

## ASEMBLE INSTRUCTION

The machine comes from the factory in a shipping configuration. Always use tools equipment and forklifts of appropriate size and capacity for the job. Always use 2 men when lifting, moving and assembling the machine.

When the machine is shipped, follow this procedure when preparing for the customer:

1. Clear the area of by standers especially small children before starting.
2. Use a forklift to lift the pallet/machine from the truck. Carry the load close to the ground.
3. Move the machine to the assembly area. Be sure there is sufficient clearance to access the machine from all sides.
4. Unpack the box, take out all the accessories.




5. Assemble the wheels.






6. Assemble the trailer bar.

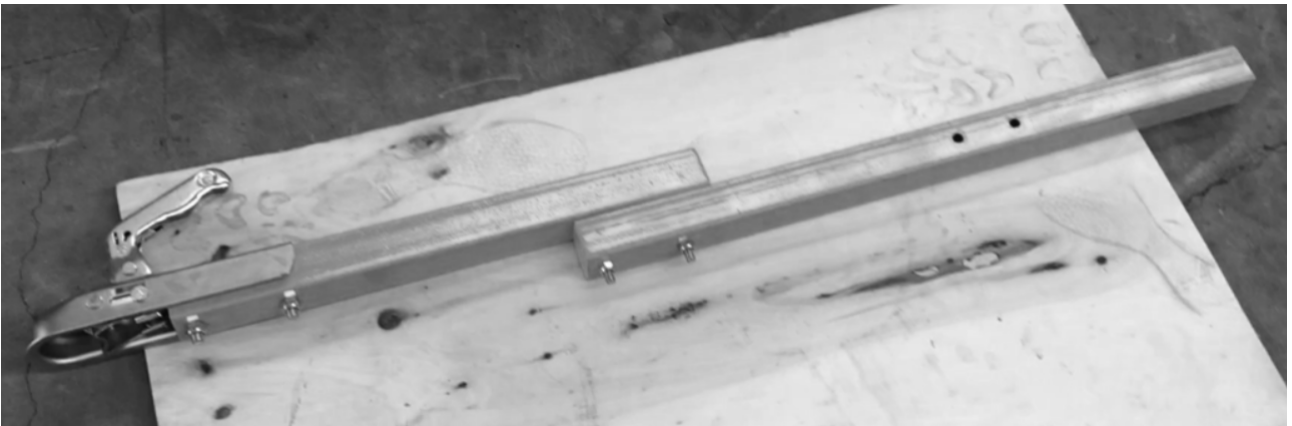

7. Install the trailer bar onto the chipper deck.



8. Assemble the jockey wheel.

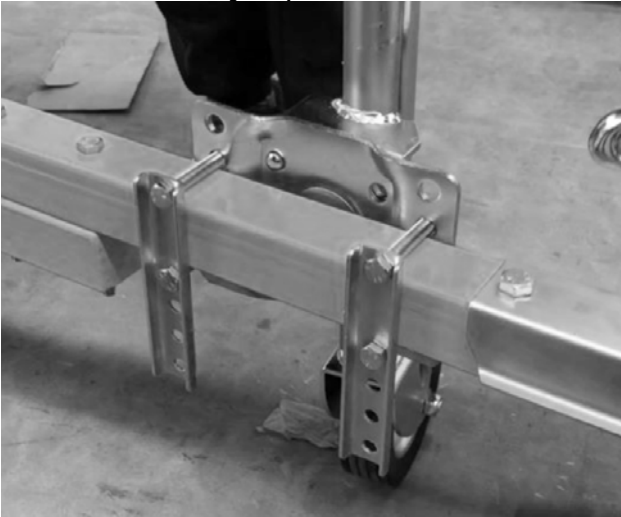

9. Assemble the feeding chute.




10. Connect the wire.



11. Assemble the emergency switch on the feeding chute.



12. Install the battery on the deck.

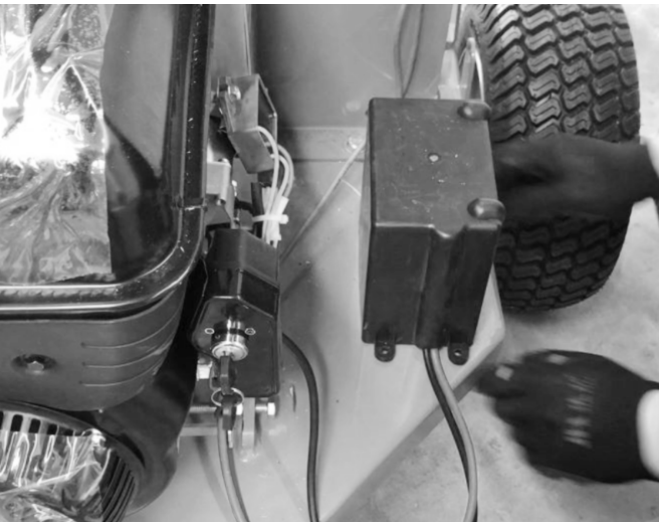

13. Assemble the wheel mud guard.



14. Assemble the output chute.

